BLOWERS ACCESSORIES


BXDD - Disc Diffuser




9" DISC DIFFUSER



OXYGENATION EFFICIENCY

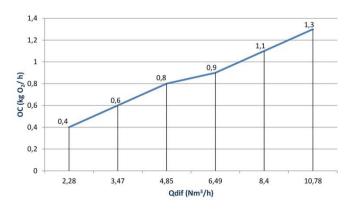

Oc Value goes by the name of SOTR in standard conditions (20 C and 1 atm pressure). SOTR: Standard Oxygen Transfer Rate

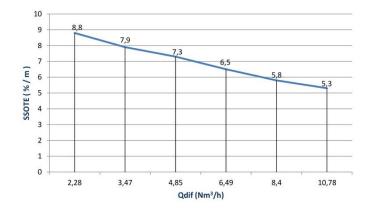



(SSOTE: Specific Standard Oxygen Transfer Efficiency)

Support Plate: Polypropylene (70%) – Glass Fiber (30%) Ring Part: Polypropylene (70%) – Glass Fiber (30%)


Membrane: EPDM or Silicone

HEAD LOSS

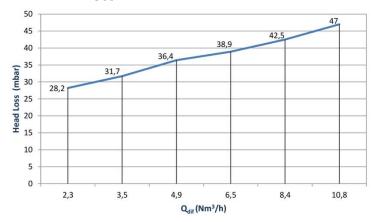

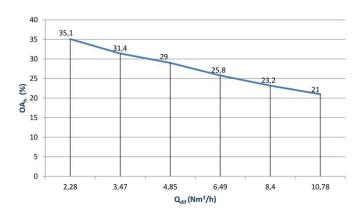

OA_h Value goes by the name of SOTE in standard conditions (20 C and 1 atm pressure). SOTE: Standard Oxygen Transfer Efficiency

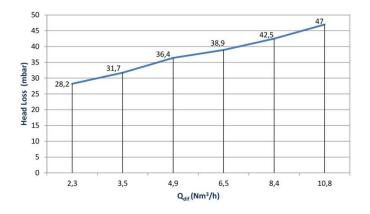

OC_{Lh} Value goes by the name of SSOTR in standard conditions (20C and 1 atm pressure). SSOTR: Specific Standard Oxygen Transfer Rate

CODE	Generic Identification	Material	Outlet BSPP Male	Effective-Total Lenght	Effective Area	Capacity	Product Weight
BLDD09EN	9" Disc Diffuser	EPDM	3/4"	270-300 mm	0,04 m ²	2-10 m ³	0,65 kg
BLDD09SN	9" Disc Diffuser	Silicone	3/4"	270-300 mm	0,04 m ²	2-10 m ³	0,65 kg

BLOWERS ACCESSORIES


BXDD - Disc Diffuser




12" DISC DIFFUSER



OXYGENATION EFFICIENCY

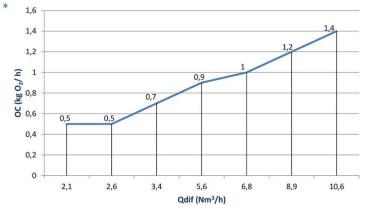

Oc Value goes by the name of SOTR in standard conditions (20 C and 1 atm pressure). SOTR: Standard Oxygen Transfer Rate.

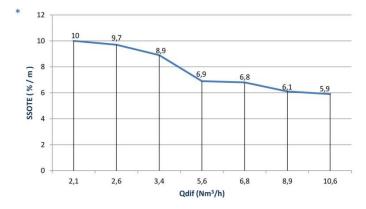



(SSOTE: Specific Standard Oxygen Transfer Efficiency)

Support Plate: Polypropylene (70%) – Glass Fiber (30%) Ring Part: Polypropylene (70%) – Glass Fiber (30%)


Membrane: EPDM or Silicone

HEAD LOSS

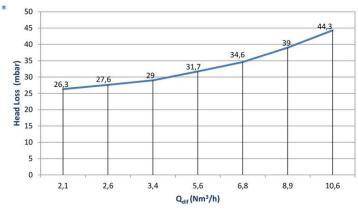

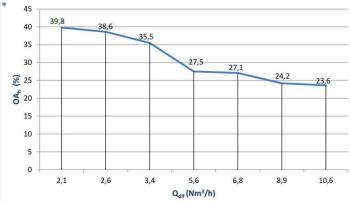

 OA_h Value goes by the name of SOTE in standard conditions (20 C and 1 atm pressure). SOTE: Standard Oxygen Transfer Efficiency

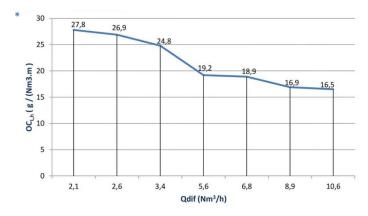

OC_{Lh} Value goes by the name of SSOTR in standard conditions (20C and 1 atm pressure). SSOTR: Specific Standard Oxygen Transfer Rate

CODE	Generic Identification	Material	Outlet BSPP Male	Effective-Total Lenght	Effective Area	Capacity	Product Weight
BXDD12EN	12" Disc Diffuser	EPDM	3/4"	340-370 mm	0,07 m ²	2-12 m ³	0,93 kg
BXDD12SN	12" Disc Diffuser	Silicone	3/4"	340-370 mm	0,07 m ²	2-12 m ³	0,93 kg